




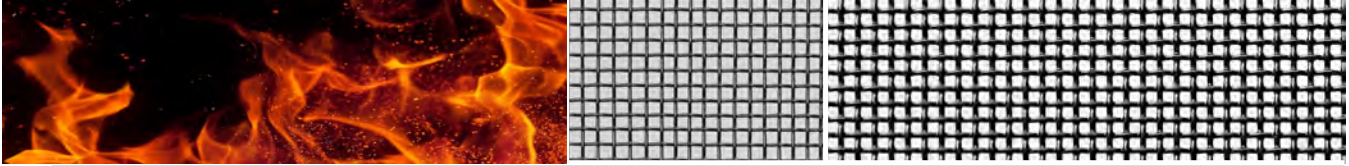


### MESH - BLACK STAINLESS STEEL



#### Roll/Sheet



	Roll	Sheet	
<b>Grade</b>	<b>316</b>	<b>304 / 316</b>	
<b>Finish</b>	Black Powder Coat	Black Powder Coat	
<b>Aperture</b>	1.67 mm	1.64 mm	
<b>Diameter</b>	0.45 mm	0.90 mm	
<b>Mesh (openings per lineal inch)</b>	12 x 12	10 x 10	
<b>Open Area % *</b>	62 %	42 %	
<b>BAL 12.5 - FZ</b> 	✓	✓	
<b>Neutral Salt Spray Test (1000 hrs)</b> 	✓	✓	
<b>Knife Shear Test</b> 		✓	
<b>Formability</b>	Self Supporting	Self Supporting	
<b>Rigidity</b>	Flexible	Ridgid	
<b>Cutting</b>	Tin Snips	Guillotine / Grinder	
<b>Other uses</b>	Pet Mesh	Security Mesh	
<b>Dimensions</b>	<b>316</b>	<b>304</b>	<b>316</b>
<b>W x L</b>			
	915 mm x 15 m	750 mm x 2400 mm	750 mm x 2400 mm
	915 mm x 30 m		
	1245 mm x 15 m	900 mm x 2400 mm	900 mm x 2400 mm
	1245 mm x 30 m		
	1550 mm x 15 m	1200 mm x 2400 mm	1200 mm x 2400 mm
	1550 mm x 30 m		
	-	1500 mm x 2400 mm	1500 mm x 2400 mm

\* Pre black powder coat finish



bushfire mesh can be used to meet the requirements of AS3959-2009 Amdt 3 for BAL 12.5 -FZ, where mesh is referenced and if the prescribed construction requirements are met.



**AS 2331.3.1 2001** Neutral Salt Spray Test' 1000 Hours- no corrosion





**AS 5041 2003** Knife Shear Test' Passed



Regular cleaning is recommended to prevent the build-up of contaminants such as dirt and salt.

### MESH - UNCOATED STAINLESS STEEL



Roll

Roll

Roll

	304 / 316		304 / 316	
<b>Grade</b>	304 / 316		304 / 316	
<b>Finish</b>	Uncoated- Mill Finish		Uncoated- Mill Finish	
<b>Aperture</b>	1.67 mm		1.64 mm	
<b>Diameter</b>	0.45 mm		0.90 mm	
<b>Mesh (openings per lineal inch)</b>	12 x 12		10 x 10	
<b>Open Area %</b>	62 %		42 %	
<b>BAL 12.5 - FZ</b>	✓		✓	
<b>Neutral Salt Spray Test</b>	✓		✓	
<b>Knife Shear Test</b>	✓		✓	
<b>Formability</b>	Self Supporting		Self Supporting	
<b>Rigidity</b>	Flexible		Ridgid	
<b>Cutting</b>	Tin Snips		Guillotine / Grinder	
<b>Dimensions</b>	<b>304</b>	<b>316</b>	<b>304</b>	<b>316</b>
<b>W mm x L 30 m</b>	915 mm	915 mm	915 mm	-
	1245 mm	1245 mm	1245 mm	1245 mm
	1550 mm	1550 mm	1550 mm	1550 mm



bushfire mesh can be used to meet the requirements of AS3959-2009 Amdt 3 for BAL 12.5 -FZ, where mesh is referenced and if the prescribed construction requirements are met.



**AS 2331.3.1 2001** 'Neutral Salt Spray Test'  
1000 Hours- no corrosion



**AS 5041 2003** 'Knife Shear Test'  
Passed



If the mesh is being used externally for aesthetic purposes, to minimise tea staining it is recommended that the mesh is pickled, passivated and electropolished.



Regular cleaning is recommended to prevent the build-up of contaminants such as dirt and salt.